

Bravura Multipoint Trim Quick-Install Instructions

1) Use Bravura interior trim (with the top and bottom through-bolt mounting screw holes) as your screw template for BOTH sides of the door. **NOTE: ALL BRAVURA MULTIPOINT TRIM HAS A 8 1/2" CENTER-TO-CENTER MEASUREMENT FOR THE THROUGH-BOLT MOUNTING SCREWS.**

2) Insert the supplied spindle into the door (photo 1a). **NOTE: spindle supplied with functions A, B, and C only.** Slide the interior trim onto the spindle, and flush against the door (photo 1b). If your door has a deadbolt and/or thumbturn, check that it is in the correct position (top or bottom) to match the trim. Also check to see that the center-to-center measurements for the spindle and the deadbolt tail-piece is correct. (N/A MP5)




NOTE: THERE ARE TWO CUSTOMARY C-TO-C MEASUREMENTS FOR MULTIPOINT LOCKS, 3 5/8" AND 4 1/8", AND BRAVURA MAKES BOTH. If the Bravura trim C-TO-C does not match your door, you have the wrong trim and the correct trim must be ordered.

3) Once the Bravura trim is flush against the door (photo 2), check to see if the through-bolt mounting screw holes at the top and bottom of the trim match existing holes in the door. If they match, proceed to step 5. If they do not match, you will need to drill holes for the through-bolt mounting screws.



4) Use a pencil/pen to mark the through-bolt mounting holes on BOTH sides of the door (photo 3a). **NOTE: DRILLING INTO THE DOOR FROM BOTH SIDES PREVENTS SPLINTERING AND OTHER DAMAGE TO THE DOOR.** Using a 1/4" bit, drill one side of the door approximately half-

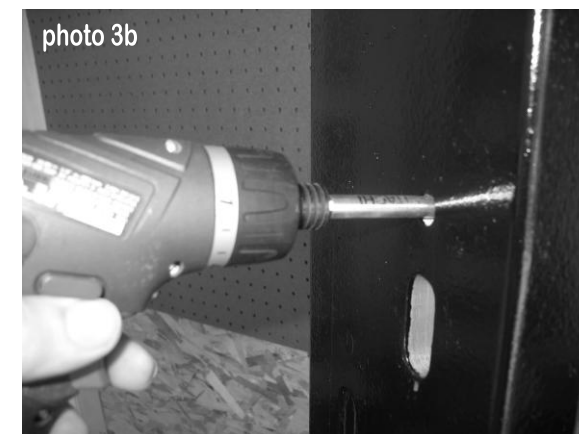

way through. Then drill from the opposite side until you connect with the first hole (photo 3b). Next, use a 3/8" drill to enlarge the exterior hole (only) to accept the boss on the exterior trim (drill approx. 1/2" into the door).

5) Mount the exterior trim on the door (photo 4a). Then, mount the interior trim (photo 4b). Insert the two through-bolt mounting screws, and partially hand-tighten (photo 4c). Do not tighten completely. Check lock function (if applicable). If function is okay, tighten screws by hand (screwdriver). **DO NOT USE A POWERED SCREWDRIVER!!** Check lock function again.



6) MP5 SPECIAL NOTE: The profile cylinder used on MP5 functions A, B, C is held in-place via a screw on the edge of the door. This screw must be completely removed to replace the old cylinder. This screw should only be tightened AFTER the through-bolts are tightened.

7) If binding occurs after tightening, you may need to increase the diameter of through-bolt mounting screw holes.

8) Call 1-800-276-1104 if you have any questions or installation issues.

Bravura

9190 Corporation Drive – Indianapolis, IN 46256

Phone: 1-800-276-1104

Fax: 1-317-598-1020